
Quilt in a Days[®] Block Three ••• Corner Star



Large Flying Geese Ruler #2007 or Mini Geese Ruler Set #2020




THE CORNER STAR.	Cutting Chart
16 SOLID COLOR 8 WHITE	BackgroundCorners(4) 2½" squaresFlying Geese(2) 5½" squaresSides(4) 2½" x 4½"Center Nine Patch Corners(4) 3½" squares
8 WHITE 4 WHITE	Accent Dark PurpleFlying Geese Points(2) 7" squaresNine Patch(4) 3½" squares
4 SOLID COLOR	Dark Green Nine-Patch Center (1) 3 ¹ / ₂ " square
Miss Mattie T. Lewelling of High Hill, Mo., who presents the Corner Star design, says it is very pretty, pieced of light and dark prints, prints and white pieces, or in two shades of the same color. (Piease clip and save.)	Accent Blue Center Triangles (2) 7 ¹ / ₂ " squares


Making Nine-Patch Center

Use a scant ¹/₄" for all sewing. Press all seams away from Center.


1. Lay out four background squares and four Accent Dark Purple squares around the Dark Green center.




2. Flip second row squares to first row squares and sew.



4 Turn block, sew to complete.




5. Press seams to center row. Square to 9".




- Finishing Center
- 1. Cut both 7¹/₂" Center triangles in half on one diagonal.




2. Add a triangle piece to each side of Nine-Patch center.




3. Open and add last row. Press seams toward Accent Dark Purple.




3. Press toward triangles. Trim tips.



4. Add remaining two triangles. Press toward triangles.



5. Should measure $12\frac{1}{2}$ ".




Making Star Points

- 1. Place smaller square right sides together and centered on larger square.
- Place ruler on diagonal so ruler touches four corners. Draw diagonal line across squares. Pin.




- 3. Sew exactly 1/4" from drawn line. Use 15 stitches per inch or 2.0 on computerized machine. Remove pins. Press to set seams.
- 4. Cut on drawn line.

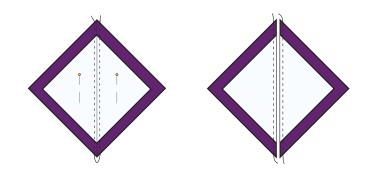


5. Place on pressing mat with large triangle on top. Press to set seam.




6. Open and press flat. Check that there are no folds, and seam is pressed toward larger triangle.



- 7. Place pieces right sides together so opposite fabrics touch. Seams are parallel with each other.
- 8. Match up outside edges. There is a gap between seams. The seams do not lock.
- Draw a diagonal line across seams. Pin. Sew 1/4" from both sides of drawn line. Hold seams flat with stiletto so seams do not flip. Press to set seam.




10. Cut on drawn line.




12. Open. This clip allows the seam allowance to be pressed away from the "geese."

- Finishing Flying Geese
- 1. Line up ruler's red lines on 45° sewn lines.




- 2. Cut block in half to separate into two patches.
- 3. Hold ruler securely on fabric so it does not shift while cutting. Turning mat, trim off excess fabric on all sides.





4. Repeat with second half.

3. Sew short strips to each side of block.




- 4. Press toward center.
- 5. Turn block and sew long pieces on block to complete.





- 1. Sew Two Geese patches to both sides of background rectangle. Make four sets.
- 2. Add Corner squares to two of the strips.



6. Press toward center.

